


Prestige Sanitary Armatures

	<p>UH00051 chromium; upper part of siphon, siphon, angle-body valves</p>	<p>UH00061 chromium; upper part of siphon</p>	<p>UH00071 chromium; angle-body valves</p>
	<p>UH00055 chromium; upper part of siphon, siphon, angle-body valves</p>	<p>UH00063 chromium; upper part of siphon</p>	<p>UH00073 chromium; angle-body valves</p>
	<p>UH00551 chromium; upper part of siphon, siphon, angle-body valves</p>	<p>UH00561 chromium; upper part of siphon</p>	<p>UH00571 chromium; angle-body valves</p>
	<p>UH00452 chromium</p>		

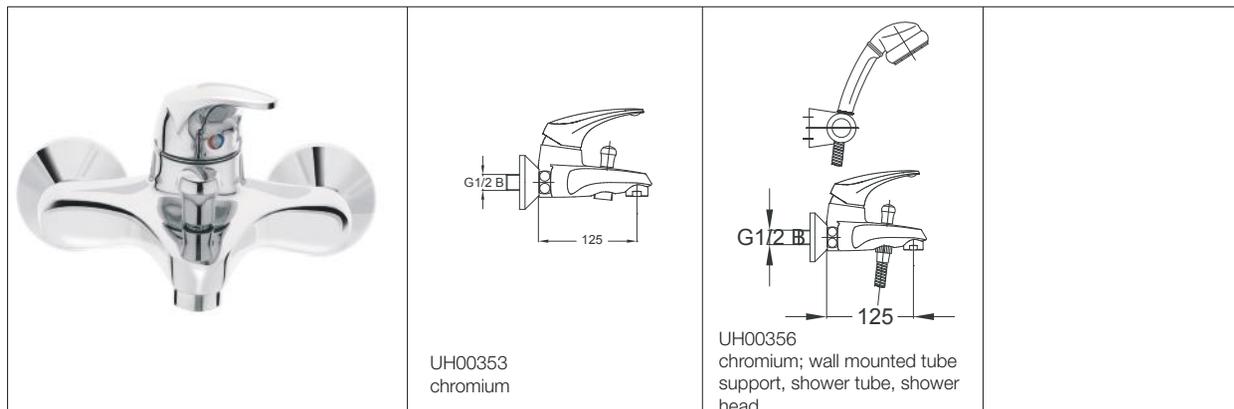

Built-in Material

Housing:	brass acc. to EN 1982, nickel-/chromium-plated
Cartridge:	ECO Temp two-stage, with water temperature limitation
Handle:	Zamak 0410, chromium-plated
Connecting pipe:	2 pcs. flexible connecting pipe, G3/8 "
Mounting hole:	Ø 35 mm diameter

Specification

Recommended pressure range:	3 to 5 bar
Maximum pressure:	up to 8 bar
Minimum pressure:	over 0.5 bar
Recommended temperature range:	5°C - 65°C
Maximum temperature:	80°C
Flow at 3 bar operating pressure:	<ul style="list-style-type: none"> • mixer battery for washing basin appr. 15 l/min • mixer battery for bath tub appr. 20 l/min
Noise class:	<ul style="list-style-type: none"> • mixer battery for washing basin class I • mixer battery for bathtub class II

Mounting And Maintenance

Flush all water feeding tubes thoroughly before installation.

Connect the sanitary armature to the water supply outlets by means of flexible tubes. Unscrew the perlator obligatorily and connect the sanitary armature in the fully open position. Open the water valves slowly and move the armature handle to all positions. A longer lasting flushing of the armature is warmly recommended after mounting so as to remove possible impurities. Any repairs shall be performed by adequately skilled personnel only.

With operating pressures over 5 bar, a pressure reducing valve shall always be fitted to the water supply tube.