

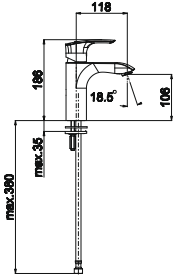
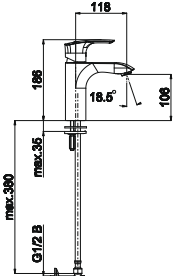
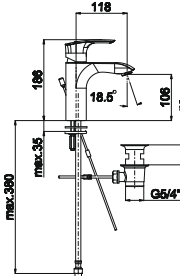


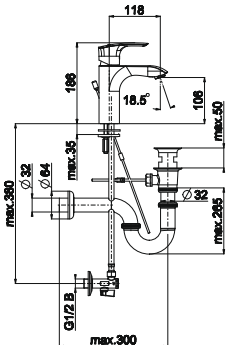
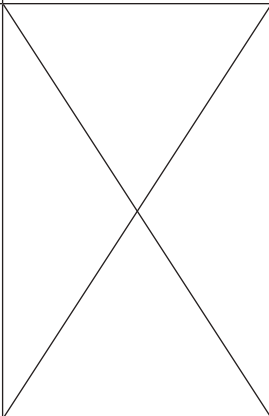
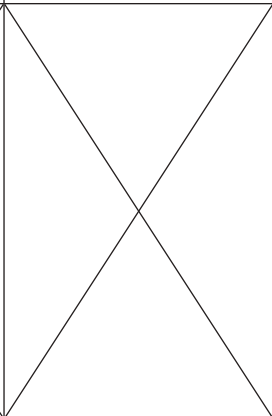


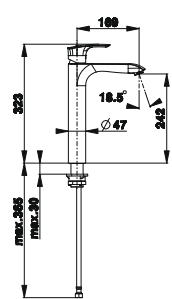
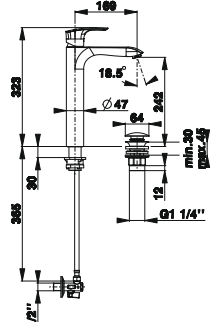
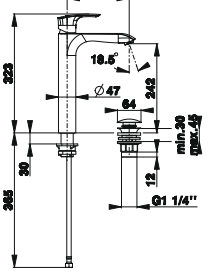

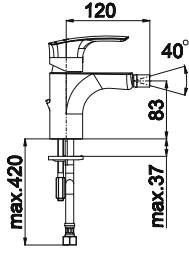
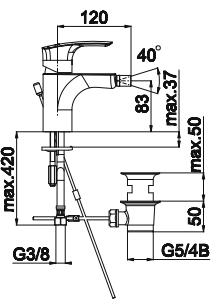
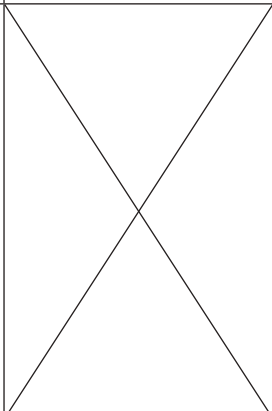


# Elite Sanitary taps

 	 <p>00088 chromium;</p>	 <p>00087 chromium; angle-body valves</p>	 <p>00086 chromium; upper part of siphon</p>
 	 <p>00085 chromium; upper part of siphon, siphon, angle-body valves</p>		
 	 <p>00089 chromium;</p>	 <p>00090 chromium; upper part of siphon, angle-body valves</p>	 <p>00079 chromium; upper part of siphon</p>
	 <p>00588 chromium;</p>	 <p>00586 chromium; upper part of siphon</p>	

**☑ Built-in Material**

Housing: brass acc. to EN 1982, nickel-/chromium-plated  
 Cartridge: EU ceramic cartridge, KTW  
 Handle: Zamak 0410, chromium-plated  
 Connecting pipe: 2 pcs. flexible connecting pipe,  
 Mounting hole: Ø 35 mm diameter

**☑ Specification**

Recommended pressure range: 3 to 5 bar  
 Maximum pressure: up to 8 bar  
 Recommended temperature range: 5 °C – 65 °C  
 Maximum temperature: 80°C  
 Flow at 3 bar operating pressure: mixer battery for washing basin      appr. 6 l/min  
 Noise class: Class I

**☑ Mounting And Maintenance**

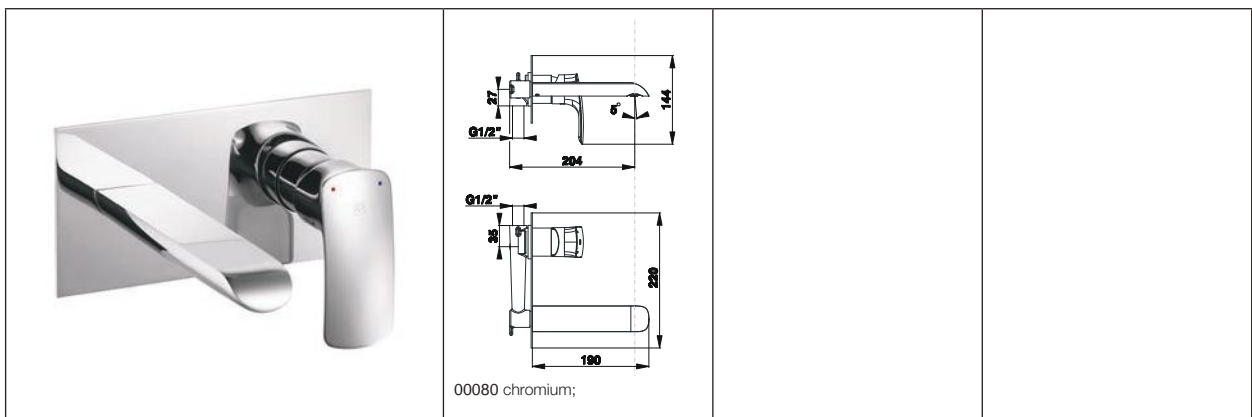
Flush all water feeding tubes thoroughly before installation.

Connect the sanitary armature to the water supply outlets by means of flexible tubes. Unscrew the perlator obligatorily and connect the sanitary armature in the fully open position. Open the water valves slowly and move the armature handle to all positions. A longer lasting flushing of the armature is warmly recommended after mounting so as to remove possible impurities. Any repairs shall be performed by adequately skilled personnel only.

With operating pressures over 5 bar, a pressure reducing valve shall always be fitted to the water supply tube.

**☑ Certificates**

Mixers acc. to EN applicable standards,  
 DVGW for components connecting pipes, aerators.



	<p>00373 chromium;</p>	<p>00374 chromium; wall holder, shower tube, shower head</p>	<p>00375 chromium; console shower tube, shower head</p>
	<p>00485 chromium;</p>	<p>00486 chromium; wall holder, shower tube, shower head</p>	<p>00487 chromium; console shower tube, shower head</p>

**☑ Built-in Material**

Housing: brass acc. to EN 1982, nickel-/chromium-plated  
 Cartridge: EU ceramic cartridge, KTW  
 Handle: Zamak 0410, chromium-plated

**☑ Specification**

Recommended pressure range: 3 to 5 bar  
 Maximum pressure: up to 8 bar  
 Recommended temperature range: 5 °C – 65 °C  
 Maximum temperature: 80°C  
 Noise class: Class I

**☑ Mounting And Maintenance**

Flush all water feeding tubes thoroughly before installation.

Connect the sanitary tap to the water supply outlets. A longer lasting flushing of the armature is warmly recommended after mounting so as to remove possible impurities. Any repairs shall be performed by adequately skilled personnel only.

With operating pressures over 5 bar, a pressure reducing valve shall always be fitted to the water supply tube.

**☑ Certificates**

Mixers acc. to EN applicable standards,  
 DVGW for components, aerators, sound reducer.